


10/503900

PCT U03/00354




TO Rec'd PCT/PTC 23 SEP 2004

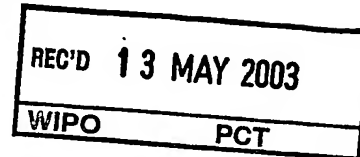

Patent Office
Canberra

I, TERESA KOLODZIEJCZYK, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PS 1310 for a patent by PAMELA LOUISE AMOS as filed on 25 March 2002.

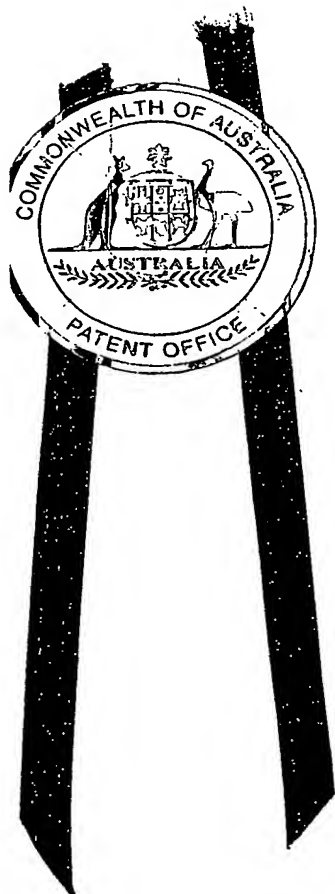

WITNESS my hand this
Seventh day of April 2003

TERESA KOLODZIEJCZYK
TEAM LEADER EXAMINATION
SUPPORT AND SALES

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

53500 HKS:ZS

P/00/009
Regulation 3.2

AUSTRALIA
Patents Act 1990

ORIGINAL

**PROVISIONAL SPECIFICATION FOR AN INVENTION
ENTITLED**

Invention Title: A CLEANING METHOD AND MEANS
Name of Applicant: PAMELA LOUISE AMOS
Address for Service: **COLLISON & CO.** 117 King William Street,
Adelaide, S.A. 5000

The invention is described in the following statement :

This invention relates to a cleaning method and means particularly related to a joining technique commonly described as a loop and hook system and otherwise recognized by use of the Trade Mark "Velcro".

- 5 Such hook and loop joining systems are now commonly used in a large number of applications.

The problem to which this invention is directed relates to many of those applications where, after a period of usage, the material becomes less useful and the joining strength available from the material is degraded.

- 10 After researching this problem, I have discovered that at least one of the problems relating to this degradation is the fact that the hook side of the attachment materials has debris which are captured thereby such that the hooks either are filled with such debris, or there are fewer hooks available to capture loops.

- 15 In a number of applications, this then results in expensive articles having to be discarded.

I have discovered, in accordance with this invention, that the hook material can be cleared or cleaned of such debris such that there is at least a substantial return to original effectiveness of the strength of attachment available between the hook and loop materials.

- 20 It is then an object of this invention to propose both a method to effect a restoration of the attachment strength and appearance between hook and loop attachment materials and also, in a further form of the invention, to provide an apparatus to assist.

- 25 In one form of this invention then although this need not necessarily be the only or indeed the broadest form of this, there is proposed a method restoration of hook to loop attachment materials which method includes the steps of effecting a raking or scooping of the hook material with a member having a plurality of spaced apart teeth where the width of each respective tooth and the spacing apart of adjacent teeth is such that each respective teeth is adapted to pass together with the other
30 teeth between adjacent hooks on the hook material.

The discovery is, of course, that a number of materials are implicitly captured by the hooks of the hook material.

5 The hooks are formed from resilient materials and include a stem which is anchored on a flexible sheet of material with the top of the stem being curved so as to form a hook shape.

This description is provided of existing hook like material as is conventionally sold and now widely used under the Trade Mark "Velcro".

10 It has been noticed that such hook material has each of the stems supported in a repeated parallel alignment with the hook extending into a row preceding the next line of stems with their own hooks.

If any attempt is made to "clean" this material, for instance, using the blade of a scraper, the stems themselves in one direction will, in a sense, divert any blade from engaging and enabling, therefore, any lift away of debris.

15 It has been discovered that the hook material has respective stems which are spaced apart a relatively uniform distance which is 0.8 mm in a typical case.

20 Allowing for the thickness of each stem, the distance between respective stems is therefore smaller than this but if a raking apparatus is prepared where the distance apart between respective is at least the thickness of a respective stem and the width of each respective tooth is less than the width apart of immediately adjacent stems in the material, then we have for the first time the ability to protrude into debris and lift this past capturing hooks.

A raking member is assisted by having a leading edge which is of wedge shape and such that a lowermost edge is forwardmost providing thereby a relatively thin lowermost edge for purging into the hook captured debris material.

25 In preference, the front shape of each respective tooth also includes, when viewed in plan, a tapered shape.

In preference, such tapered shape includes a medial forwardmost point with respective sides inclined away from such forward point.

One of the difficulties with the arrangement now described is that some of the debris that has been discovered can be caught comprises fine threads, lint, cotton materials and the like.

- 5 If a single pass is then effected with a single row of teeth in accordance with this description so far, then while some of the debris is lifted, a lot of it is either broken by this first pass and is therefore left even though partially dislodged.

- 10 It has been found to be of significant advantage to have a second line of teeth aligned and shaped and having the same general characteristics as a first line of teeth so that the raking apparatus then is characterized by having two lines of teeth in echelon.

The advantage has been discovered in this that with the first pass then considerably more material is lifted and captured where the first line of teeth partially lift, the second line of teeth engage further and can lift out fully the debris in practical circumstances.

- 15 In each case, the invention can reside in an apparatus for restoration of hook/loop attachment materials of the type conventionally sold under the Trade Mark "Velcro" where there is a rake comprised of a plurality of teeth aligned in side by side alignment, each of the teeth being separated by an adjacent tooth with a gap that is at least the width of a respective stem of each of the hooks, and where the width of
20 each respective tooth is the same and is less than the distance between respective stems.

In preference, the leading edge of such respective teeth in each case includes a lowermost narrow edge with a body of the tooth providing then a forward wedge shape.

- 25 In preference, the leading edge of each respective tooth is tapered both when viewed from a side and when viewed in plan.

- 30 In preference, there are at least two sets of such teeth held so that they will then define between respective teeth the width of a respective stem of the hook material, and where each of the teeth is of a width that will pass between respective stems.

In preference, the rake is formed from plastics material and is such that the gap between respective teeth has a length that is relatively short so as to provide significant strength to each forwardly projecting portion of each tooth.

5 For a better understanding of this invention it will now be described with reference to an embodiment which shall be described with the assistance of drawings wherein:

10 FIG 1(a). is a perspective view of the preferred embodiment illustrating the way in which it is used;

FIG 1(b) is a perspective view of the preferred embodiment illustrating an alternative way of using it;

15 FIG 2 is a side elevation of that same embodiment;

FIG 3(a) is a plan view of that same embodiment;

FIG 3(b) is the view from the underside of that same embodiment;

20 FIG 4 is a detail side view, illustrating the way in which the embodiment is used with the hook side of a hook and loop attachment system;

25 FIG 5 is a detail front view, illustrating the way in which the embodiment is used with the hook side of a hook and loop attachment system;

FIG 6 is a detail plan view, illustrating the way in which the embodiment is used with the hook side of a hook and loop attachment system;

30 FIG 7 is a detail perspective view, illustrating the way in which the embodiment is used with the hook side of a hook and loop attachment system; and

FIG 8 is a detail side view, illustrating an alternative means in which the embodiment can be used with the hook side of a hook and loop attachment system;

35 Now referring to the drawings, there is shown a body 1 which is made from

injection moulded plastics material.

The body 1 has two sets of fingers being a primary set 2 and a secondary set 3.

5 The both sets of fingers 2 and 3 are arranged so that they are aligned, one along side the other, leaving therebetween a slot shown typically at 4 in the one case and 5 in the other, so that there are therefore a plurality of these slots which are parallel one with respect to the other, in respect of each set.

Also, each finger has in the main sides typically shown at 6 and 7 which are parallel one to the other and also therefore the fingers themselves are parallel and are spaced apart an equal distance from one another.

10 The problem to which this invention is directed is a technique for being able to restore the hook portion of "Velcro" type connecting materials.

15 This material is shown typically at 8 where there are a plurality of stems 9 supported in a base 10 where each of the stems and the uppermost end of the stem which is bent into a hook shape, are aligned in rows where the hook portion extends relatively uniformly into the row and further, the stems are spaced apart in each row by a uniform distance.

This distance apart from center of one stem to a center of another is in a conventional system 0.8 mms. (This is, however, the one version and where the distance is different a different spacing of fingers will be more efficient).

20 The concept is to have each of the fingers 2 and 3 both spaced apart and of an individual thickness so that they will pass between respective stems of the hook shape members and, as well, match adjacent gaps so that respective fingers will collectively be able to pass between adjacent stems and thereby collect debris including fibres that otherwise would be trapped and make the effect of the hook
25 materials less useful.

Each finger has a lowermost narrow edge or sharper edge at its front.

This implicitly then provides for an inclined front face 2 so that as the finger is projected between the stems, there will be the ability for the leading lower sharper edge to get beneath any debris and therefore provide an effective lifting of this

away from a base.

A further feature of each of the fingers is that a leading lower edge is also tapered so that there will be the effect when the leading edge is pushed randomly against the rows of stems, each of the fingers will be caused to "center" between the stems by reason of this front taper, which is shown at 13.

The sharpness of the bottom edge and the degree of taper is chosen so that these are compatible with the material from which the body is moulded.

Some plastics material will be softer or will be subject to rapid wearing and the extent of taper and the sharpness of the lower edge are, in the first instance, as much as can be tolerated without undue weakening, in the case of the finger, the overall strength of the finger or, in the case of the lowermost edge, so that it will be expected to maintain the shape after at least a reasonable number of uses.

The feature of having two sets of fingers where a first set is positioned so that it can be in a leading position and there is the second set orientated approximately at a similar orientation with respect to the first, firstly has the effect of providing a second set of fingers which will catch partially lifted materials from the lifting effect of the first, fingers.

It has been noticed that a single pass will often lift ends of fibres or tear materials and if a second set of fingers with the same pass and immediately behind the first is pushed through the hook materials, and in each case having the same tapered front and sharp lowermost leading edge, then the efficiency of the cleaning process using this device and method is improved significantly.

The depth of each respective slot between fingers is chosen so that there will be a sufficient clearance for respective stems with their uppermost hooks but is not intended to be very much longer so as to leave the greatest possible strength available to the material providing the body of the respective fingers.

Given that these are necessarily thin, and it is generally better that they are not unduly high in thickness which is defined by the distance apart of the respective stems, the ability to limit perhaps to a factor of two to three times the individual width of each finger is of advantage.

A remainder of the body 1 is shaped with a curve so as to be appropriate for holding between a finger and thumb as is shown where hand 15 is shown holding appropriately the body 1.

- 5 The body can be used in three different ways, one of which is to effect a lifting or scooping where the first set is positioned so as to be slightly inclined to a base and the following set of fingers will pick up lifted debris from the first set.

It is, however, possible to use the body with the fingers in an approximately vertical orientation so that it is used then as a final scraping of residual debris.

This is shown in the drawings.

- 10 The method then is to use such an apparatus in conjunction with the hook side of Velcro style materials in the manner disclosed.

- 15 While plastics material has been referred to as one material, it is also possible for this article to be made from any other appropriate material including metal which would have a longer life and would allow individual edges, especially forward sharper edges to be able to be maintained for longer during use.

While there has been described specific ways in which the member can be used and which is a most efficient way to use the member, the member as has been described can be used in different ways in connection with the hook material even though such alternate methods may not be the most efficient way.

- 20 Throughout this specification the purpose has been to illustrate this invention and not to limit this.

Dated this 25th day of March 2002

25

PAMELA LOUISE AMOS
By her Patent Attorneys,
COLLISON & CO.

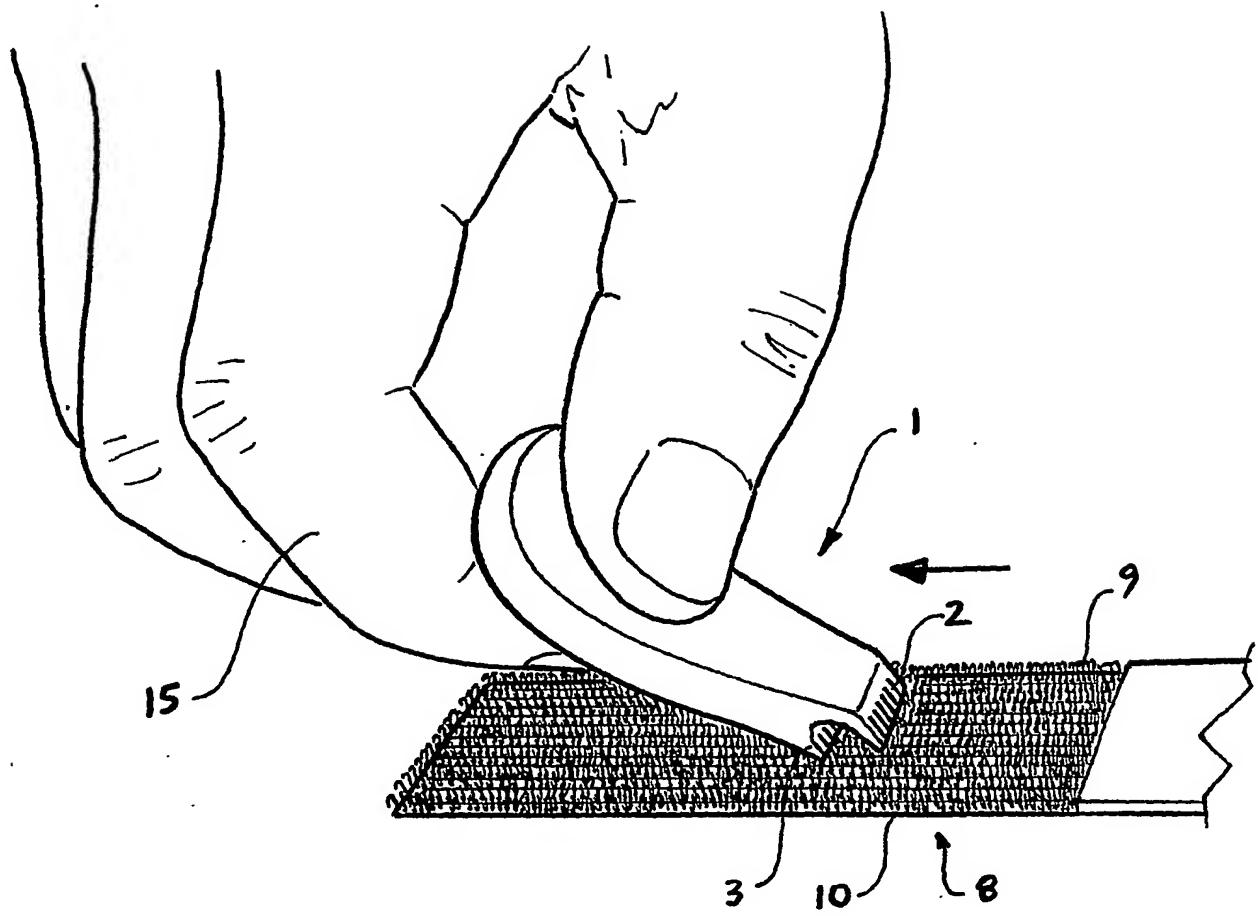


Fig 1a

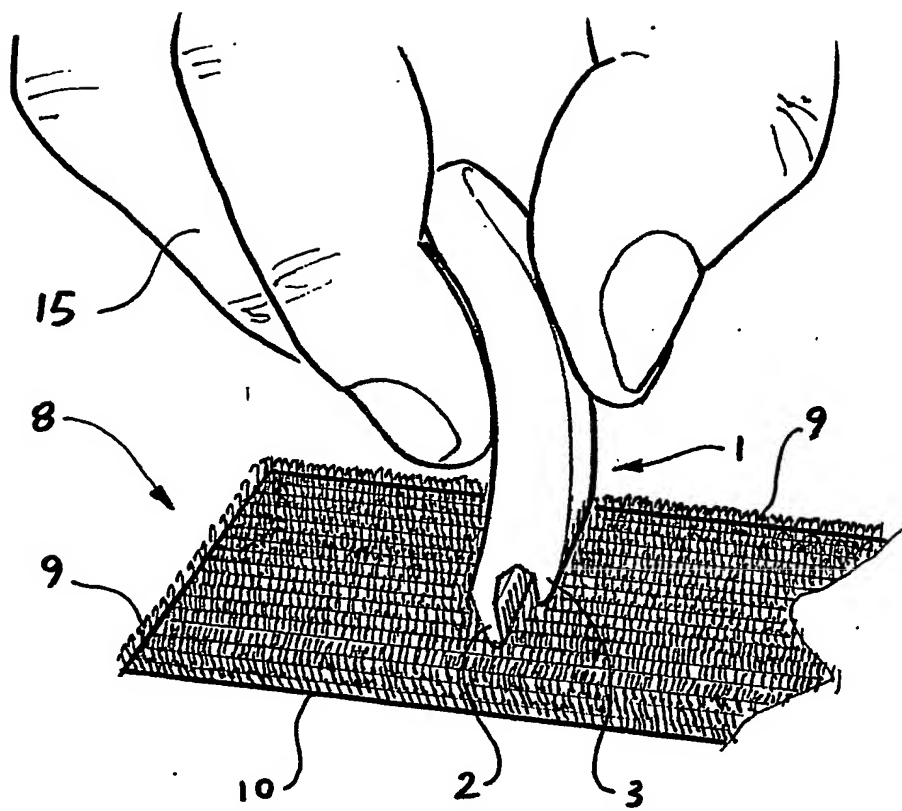


Fig 1b

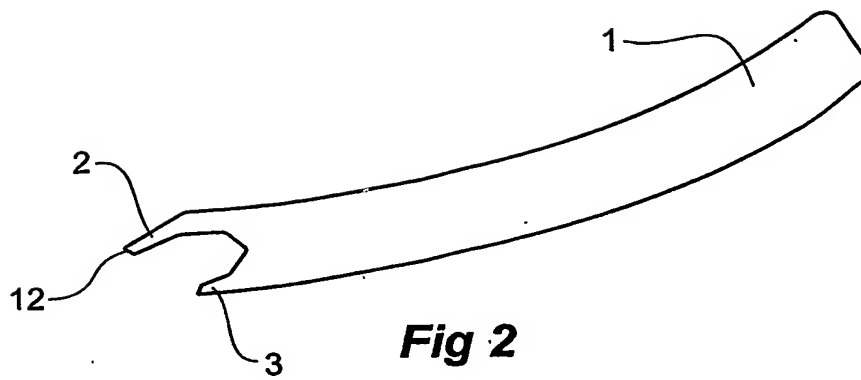


Fig 2

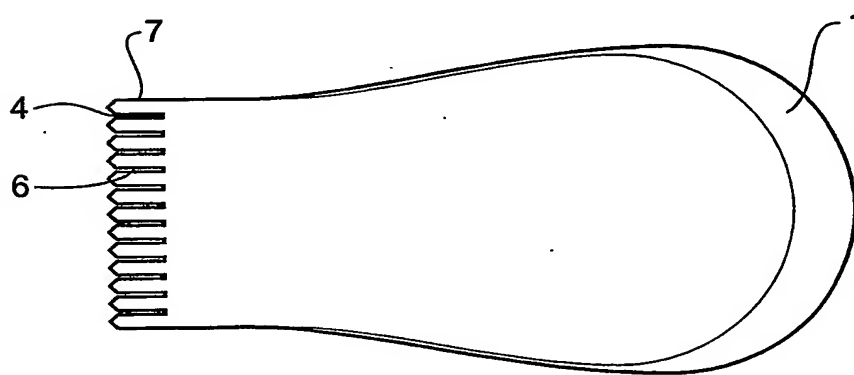


Fig 3a

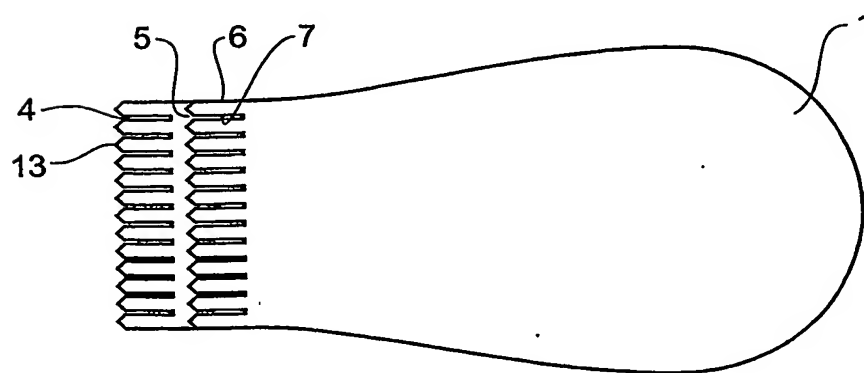


Fig 3b

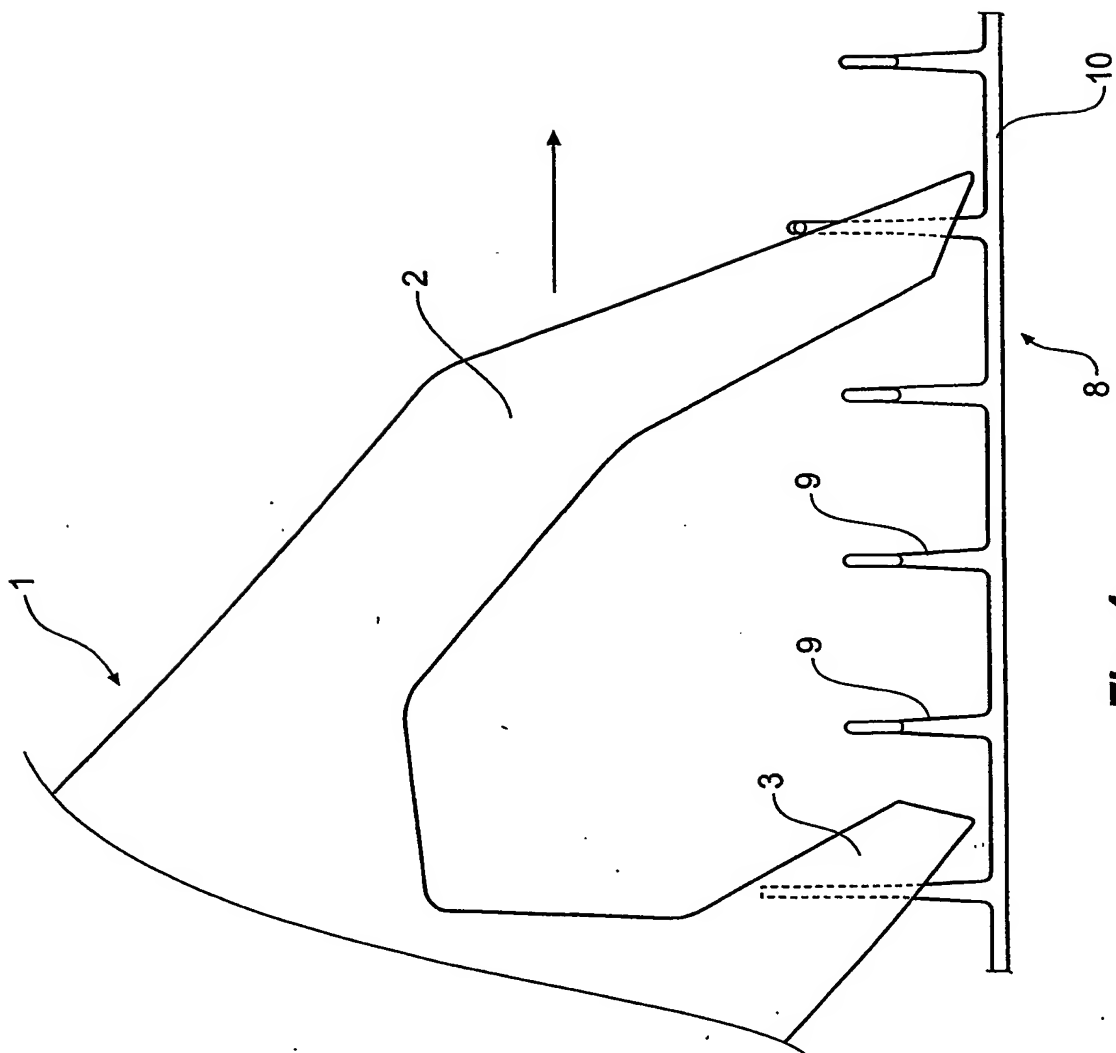


Fig 4

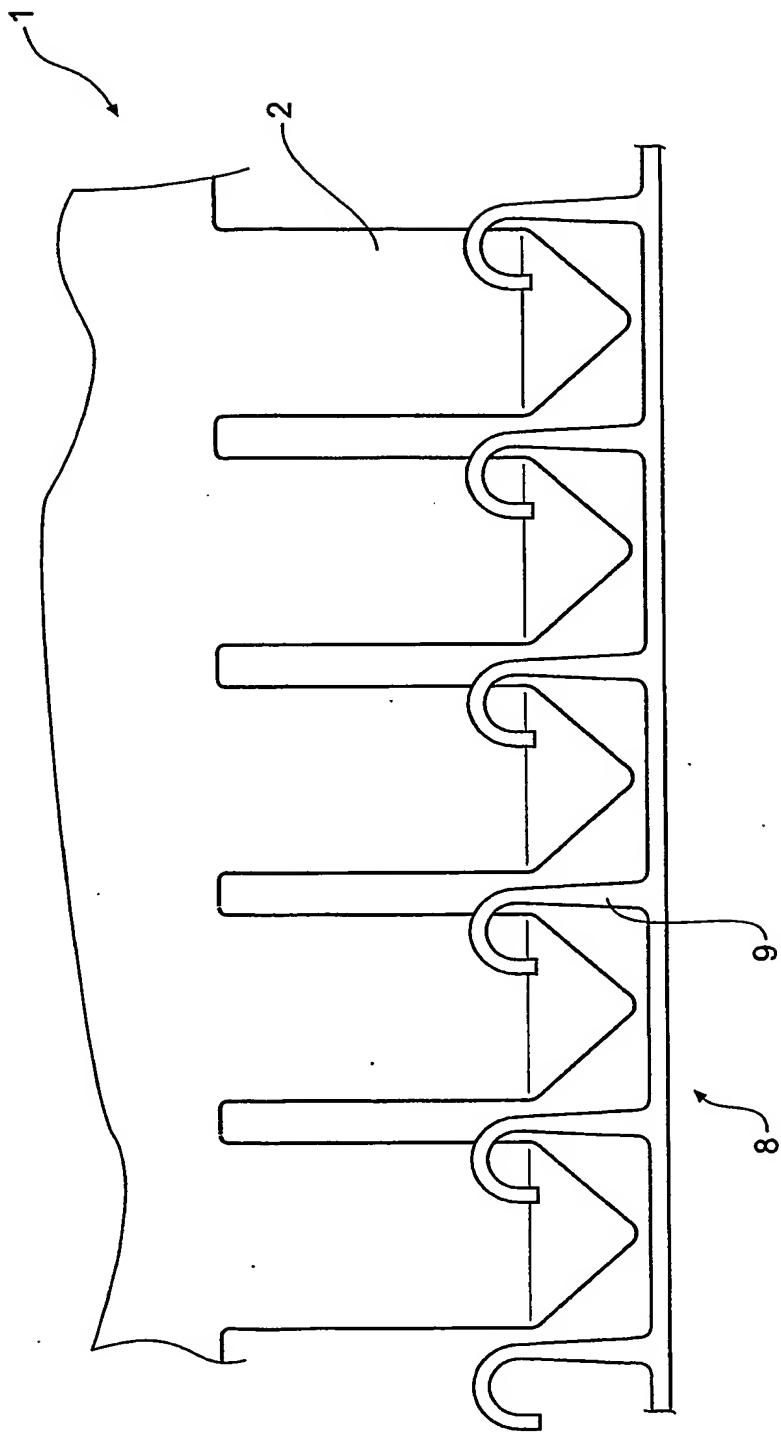


Fig 5

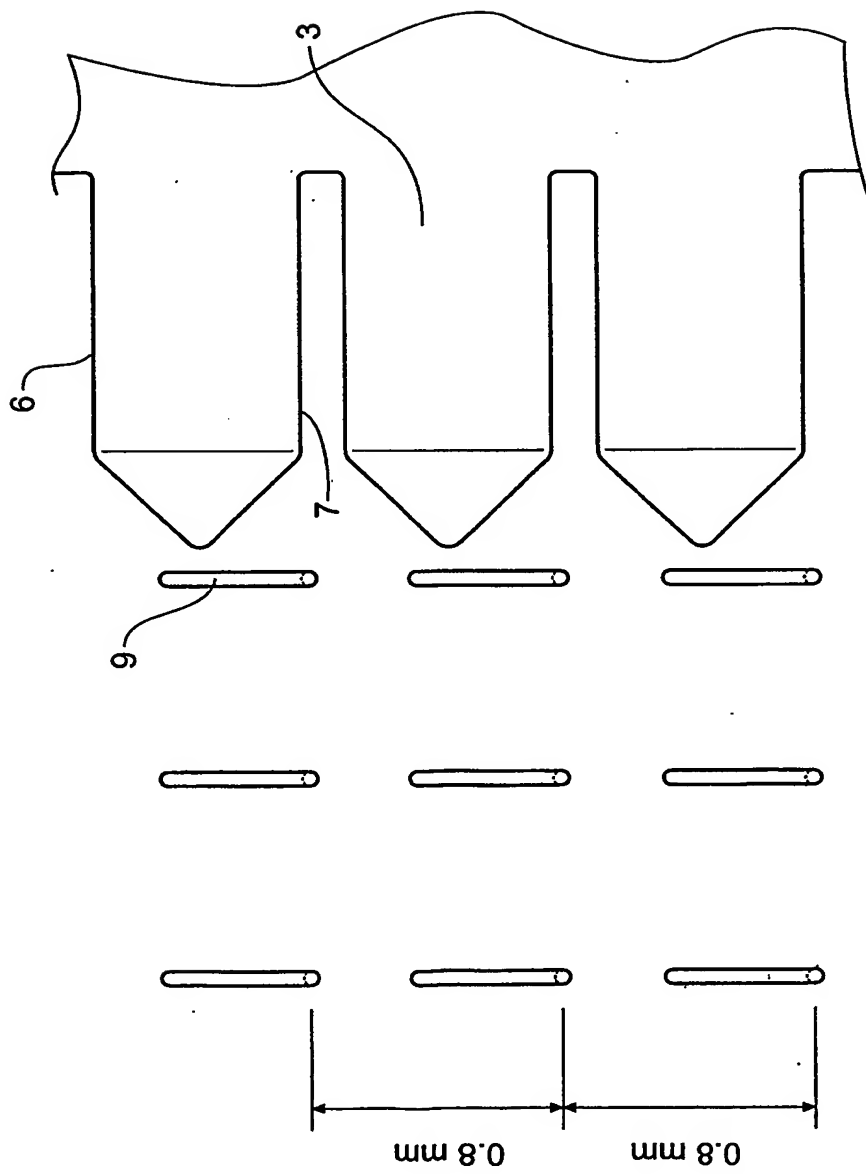


Fig 6

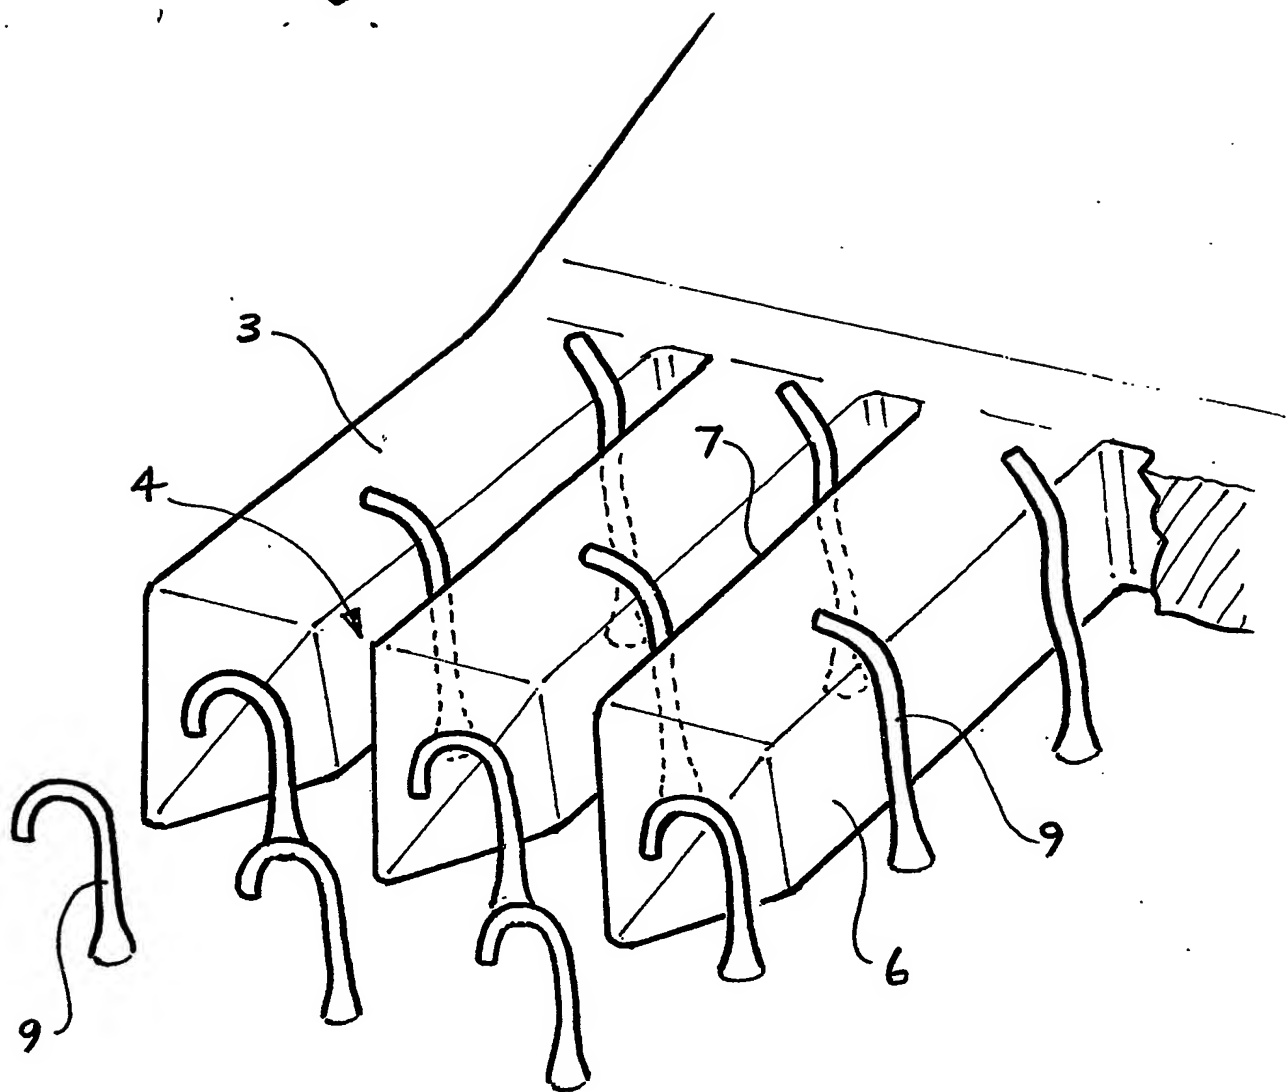


Fig 7

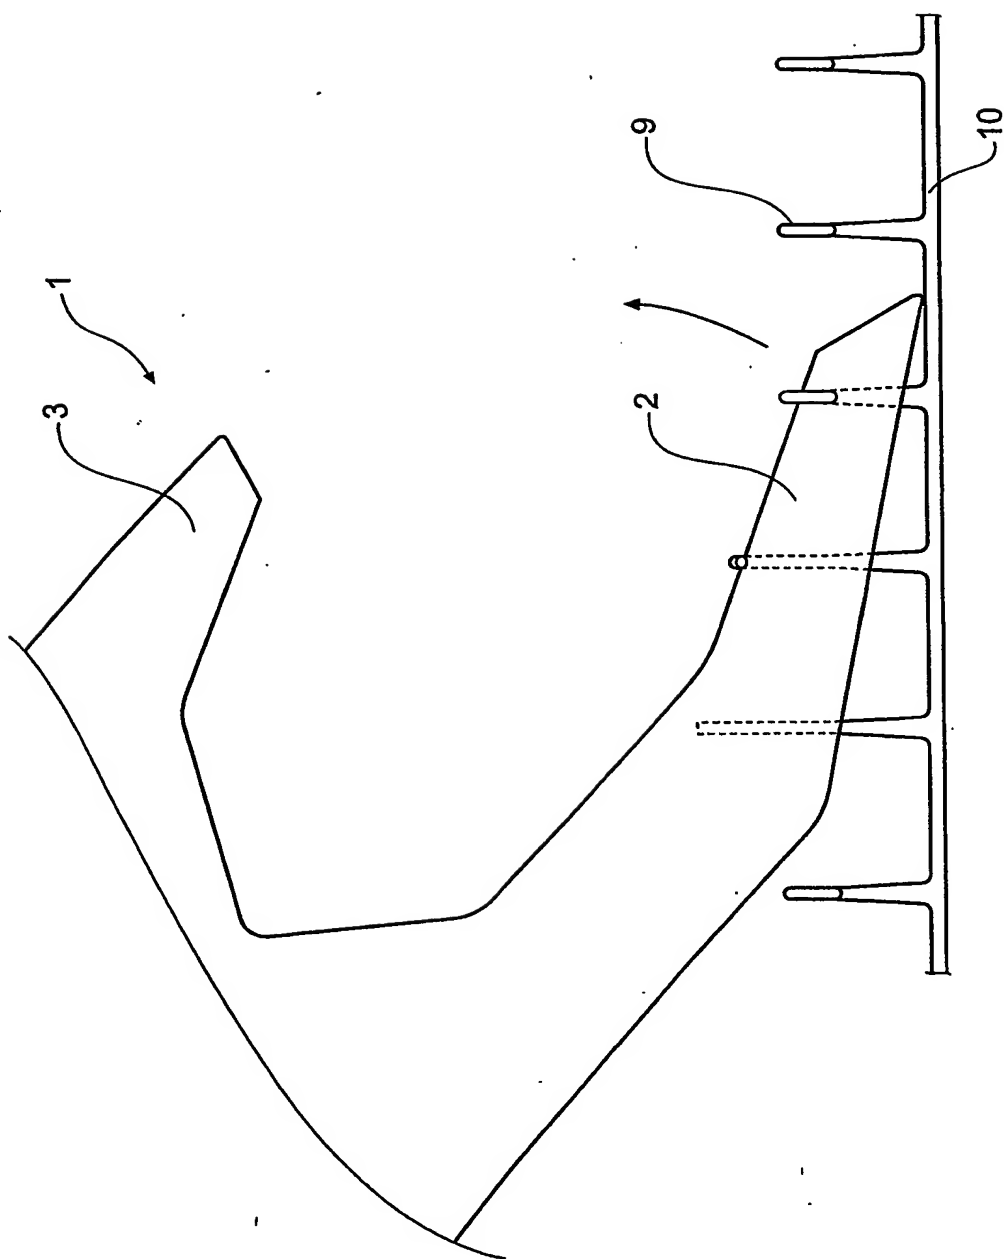


Fig 8

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.